

SRIVIJAYA VISAKHA MILK PRODUCERS COMPANY LIMITED

CIN :UI5209AP2006PTC048708

An ISO 9001 & 22000 Certified Dairy

Regd.No.48708/05-06, (Visakha Dairy, Visakhapatnam -530012)

Lr.No. 53/AGM(C&P)/Garbham/ 23

Dt. 29/09/2026.

To,

Sir/ Gentleman,

Sub:-C&P Wing- Visakha Dairy- Visakhapatnam – Construction of Shed for Godown cum Office with Aluminium Roofing (Ground floor) at GARBHAM Village, Merakamudidam Mandal in Vizianagaram District - Quotations - Reg.

@ @ @


You are requested to quote your lowest price for Construction of Shed for Godown cum Office with Aluminium Roofing (Ground floor) at GARBHAM Village, Merakamudidam Mandal in Vizianagaram District including Building materials and labour charges for the works mentioned (Annexure enclosed).

The Quotations should be addressed to the Managing Director, Sri Vijaya Visakha Milk Producers Company Limited, Opp. BHPV, Visakhapatnam-530012 and the same should reach this office on or before 06/10/2026 by 11.00 A.M the same will be opened on date: 08/10/2026 by 12.00noon.

Encl:-

- 1) Specification Annexure.
- 2) Drawing.

Yours faithfully,


(K.Srinivasa Rao)

Asst.General Manger,

Civil & Projects.

Contact No.9963553888.

~~Office of the Managing Director,~~

ANNEXURE

Name of the Work :- Construction of Shed for Godown cum Office with Aluminium Roofing of size 65'-9" x 36' and extension of shed 10' x 65'-9" on both sides at GARBHAM(V), Merakamudidam (M), Vizianagaram district.

S.No	Description of work	Qty	Per	Rate	Per	Amount
1	Earthwork Excavation in any type of gravelly soils except rock requiring Blasting in all conditions such as dry, wet and slushy & Depositing the soils including all incidental and operational charges etc., complete. including bailing of water	80.00	Cum		Cum	
2	Supplying and filling of Crusher dust in foundation confirming to standard specifications including cost and conveyance of all materials, labour charges, ramming, consolidation etc., complete as directed by the dept. During the execution of work.	5.00	Cum		Cum	
3	C.C.(1:6:10) Prop. using 40mm gauge HBG metal of approved quality including cost and conveyance of all materials, labour charges, machine mixing, curing etc., complete. Excluding cost of Cement.	17.00	Cum		Cum	
4	R.R. Masonary in C.M(1:6) Prop. using rough stones of approved quality including cost and conveyance of all materials, labour charges, curing, providing Bond stones. Excluding cost of Cement.	20.00	Cum		Cum	
5	R.C.C(1:1.1/2:3) Prop. using 20mm gauge HBG graded metal Machine crushed of approved quality including cost and conveyance of all materials, labour charges, machine mixing, vibrating, finishing and curing, Centering charges etc., complete. But excluding the cost of steel reinforcement of work & its fabrication charges which will be accounted separately for the following items of works. Excluding cost of Cement.					
a	Columns Pedastals	25.00	Cum		Cum	
b	Columns	16.00	Cum		Cum	
c	Plinth beam	12.00	Cum		Cum	
d	Lintel beam	0.50	Cum		Cum	
e	Tie beam	2.10	Cum		Cum	
f	Sunshades	0.50	Cum		Cum	

S.No	Description of work	Qty	Per	Rate	Per	Amount
g	Raft slab with VDF flooring	45.00	Cum		Cum	
6	Cutting, Bending and Fabrication of bars & Placing them in position of all sizes on MS ribbed bars & for all items of RCC works at all heights including cost and conveyance of all materials, Binding wire, labour charges etc., complete, Excluding cost of Steel.	5.60	MT		MT	
7	Refilling with excavated earth in column pits confirming to standard specifications all labour charges, ramming, consolidation etc., complete as directed by the dept. During the execution of work.	40.00	Cum		Cum	
8	Supplying and filling of Gravel in Basement confirming to standard specifications including cost and conveyance of all materials, labour charges, ramming, consolidation etc., complete.	230.00	Cum		Cum	
9	C.C.(1:4:8) Prop. using 40mm gauge HBG metal of approved quality including cost and conveyance of all materials, labour charges, machine mixing, curing etc., complete. Excluding cost of Cement.	32.00	Cum		Cum	
10	Brick Masonary in C.M(1:6) Prop. using 1st class Country Bricks of approved quality from masonary for walls of all thickness including cost and conveyance of all materials, labour charges, curing, racking the joints, scaffolding charges etc., complete. Excluding cost of Cement.	47.00	Cum		Cum	
11	Plastering in C.M(1:4) Prop. 3/4" thick in Single coat with smooth finishing including cost and conveyance of all materials, labour charges, curing, Scaffolding charges etc., complete. for all walls inside & outsides. Excluding cost of Cement.	475.00	Sqmt		Sqmt	
12	Supplying and fixing in position of Powder coated Alluminium two track sliding window shutters (Zindal or Indal variety), 61.85 X 31.75 X 1.5mm two track box Section, top & side. 61.85 X 31.75 X 1.5mm box section, Shutter 40 X 20 X 1.5mm section with button locks, Handles, Bearings (TPI) etc., 4mm plain glass of modiguard/Saint gobin company with necessary Hardware including 4mm pvc clear beading etc, complete.	7.50	Sqmt		Sqmt	


S.No	Description of work	Qty	Per	Rate	Per	Amount
13	Supplying & Fixing of Aluminium Door with Powder coated section around 101x44.45x2mm, verticals with 85x44.45x2mm, top & centre 95x44.45x2mm thick, and Bottom 85x44.45x2mm with Bottom 12mm thick WPC panel Sheet and 5mm thick plain glass saint gobain, including necessary clips, Screws, Clamps, Rubber beeding, Glass putty, Tower bolts, Handles, Hinges, 2 sets of Lock & Keys, wooden track sleeves etc, complete. (Zindal or Indal variety)	9.00	Sqmt		Sqmt	
14	Manufacturing, supplying and fixing of MS Grills of approved design of size 12mm square MS bars, 100mm c/c 30x30x6mm MS Angular around frame for Window grills including cost and conveyance of all materials and fabrication charges etc, complete.	7.50	Sqmt		Sqmt	
15	Painting two coats with Birla White cement paint after cleaning the surface perfectly well cost includes cost and conveyance of all materials, labour charges, cost of Brushes etc., complete.	475.00	Sqmt		Sqmt	

Rs

Note Cement & Steel will be supplied by the dept as per the requirement at Site


SIGNATURE OF THE CONTRACTOR

Note: - I Agree that Management has right either to accept / reject the tenders without ascertaining any reasons.

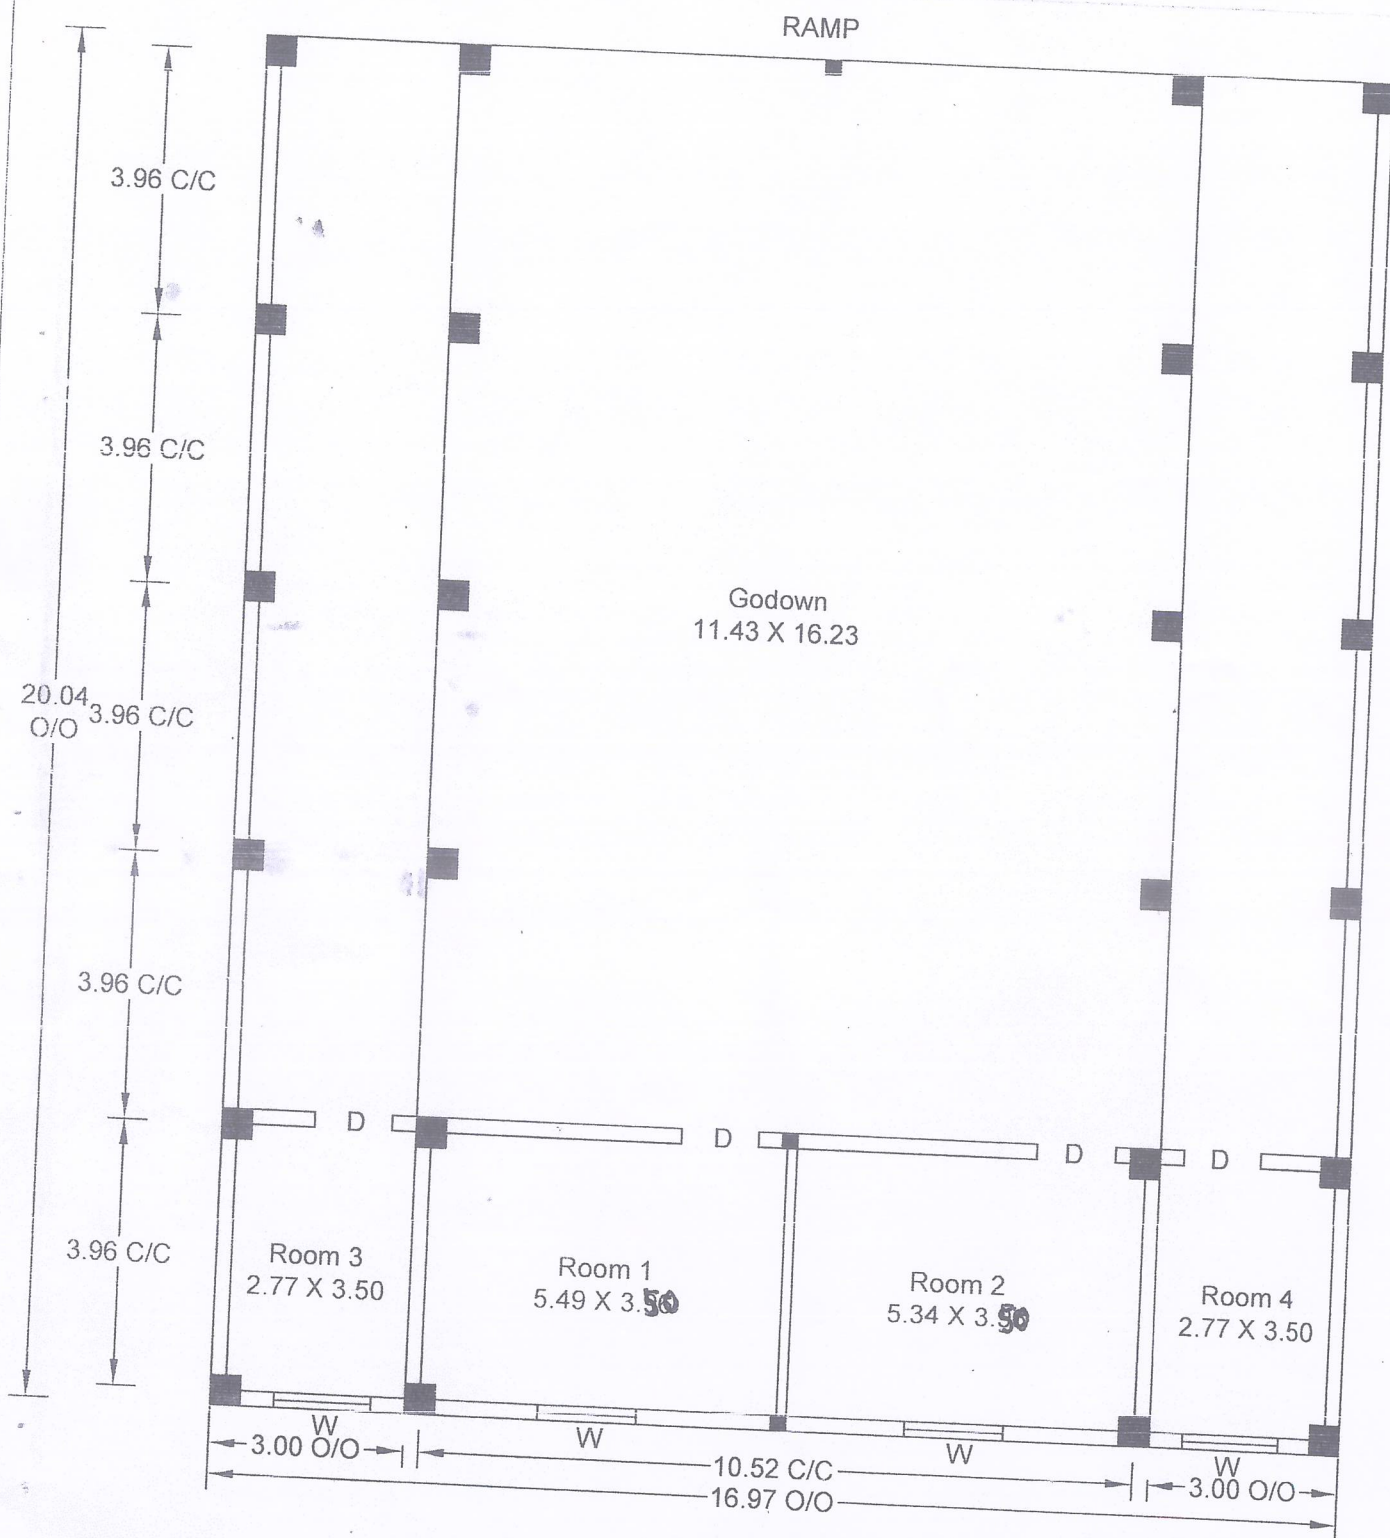

PLAN

**Construction of Sailaze Grass Machinery
Godown & Office Rooms at Garbham**

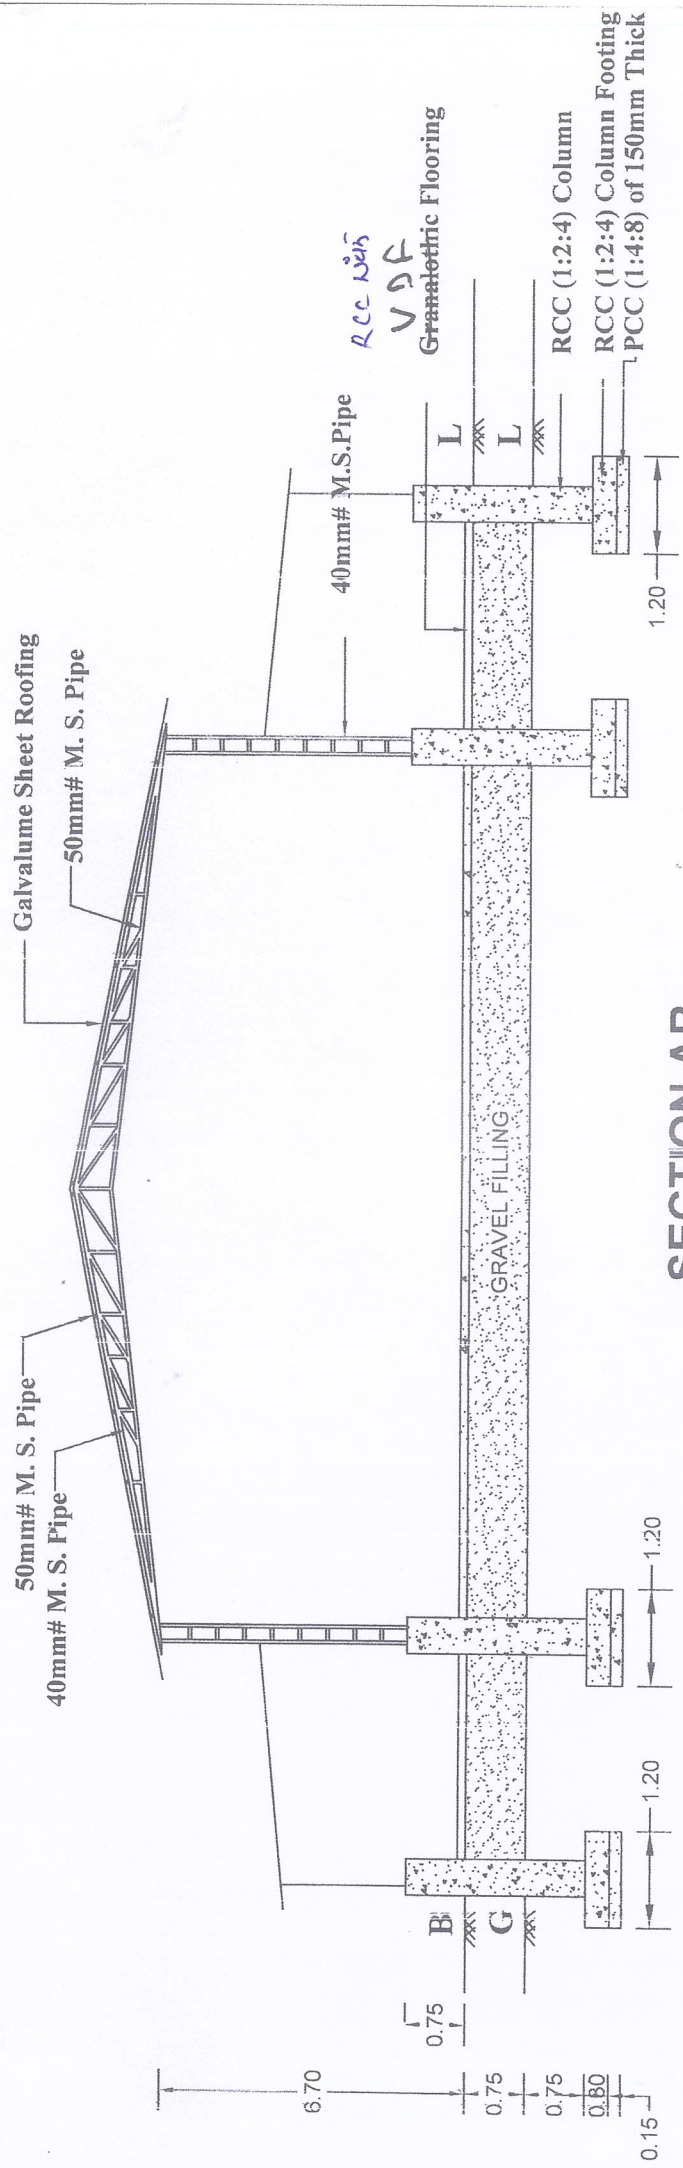

SECTION AB

Construction of Sailaze Grass Machinery Godown & Office Rooms at Garbham